



High Density Cabling Solution

FOCC HD Panel



1U/144F LC/72F SC
1U/288F MDC (2ports adapter)
1U/432F MDC (3 ports adapter)



2U/288F LC/144F SC
2U/576F MDC (2ports adapter)
2U/864F MDC (3 ports adapter)



4U/576F LC/288F SC
4U/1152F MDC (2ports adapter)
4U/1724F MDC (3 ports adapter)

FOCC high density unique design patch panel, with maximum LC connecting & cabling, adopt the high-strength environmental light weight material and superior surface treatment technique, which make the panel achieved complete function and various flexible cabling solution.

Composition:

- Aluminum or cold rolled steel patch panel
- Plug-in cassette module with self-lock institutes
- Fibre adapter
- MPO/MTP and MDC trunk cable
- MPO-LC/MDC fan out or LC/SC/MDC trunk patch cord

Features

Super Density Cabling

- 1U/288F MDC / 144F LC / 72F SC
- 2U/576F MDC / 288F LC / 144F SC
- 4U/1152F MDC / 576F LC / 288F SC

Easy Operation

- Standard 19" Patch Panel
- Environmental light weight Aluminum material
- Independent plug-in cassette
- Front-end cable management
- Stable adapter structure

Various Flexible Cabling

- Compatible with 8F&12F solution
- Replaceable label and layer remark
- Duplex and Quad adapter available
- Various connectors are optional
- MPO-LC fan out and LC/SC trunk cable
- Multi-applications in Data centre and FTTX

Specification

ITEMS	1U ODF	2U ODF	4U ODF
Dimension	435x460x44mm	435x460x88mm	435x460x176mm
Weight (contain cassette)	3.7 kg	6.4 kg	11.2kg
Packing box	539x366x94mm	539x366x139mm	539x336x226mm
Cassette QTY	6Pcs	12Pcs	24Pcs
Capacity	MDC 288F/LC 144F/SC 72F	MDC 576F/LC 288F/ SC 144F	MDC 1152F/LC 576 F/ SC 288F
Operating Temperature	-20℃ ~ +60℃		
Patch cord Category	MPO/MTP-MDC/LC/SC Fan out or MDC/LC/SC trunk patch cord		

Features



01 24F cassette module, suit for 3x8F/
2x12F/1x24F LC and 4x12F MDC connection

02 Environmental light weight design
(Aluminum) and anodized surface
treatment guarantee the good quality

03 Side mounting bracket design
achieve flexible adjustment

04 The smart self-lock institute design
achieve easy inserting and pulling

05 The cassette compatible with LC duplex/SC
simplex/MPO figure SC / MDC 2 ports adapters

06 Pocket label convenient for independent
label printing and replacement

Features




01 | Independent cassette for smart cable management

02 | Multi-Layer Cassette for easy separated operation


03 | Label corresponding with each cassette for clear identification
Open and close the cassettes by pushing the label keys

Features

- 01 FOCC design with
- 02 reserved space for cable in with 24f splicing connection.
- 03 Each cassette support 4
- 04 MPO/MTP adaptor, available
- 05 for 1x24, 2x12 and 3x8 LC
- 06 and 4x12 MDC solutions
- 07 FOCC panel with
- 08 independent cable management frame to fix the trunk cable

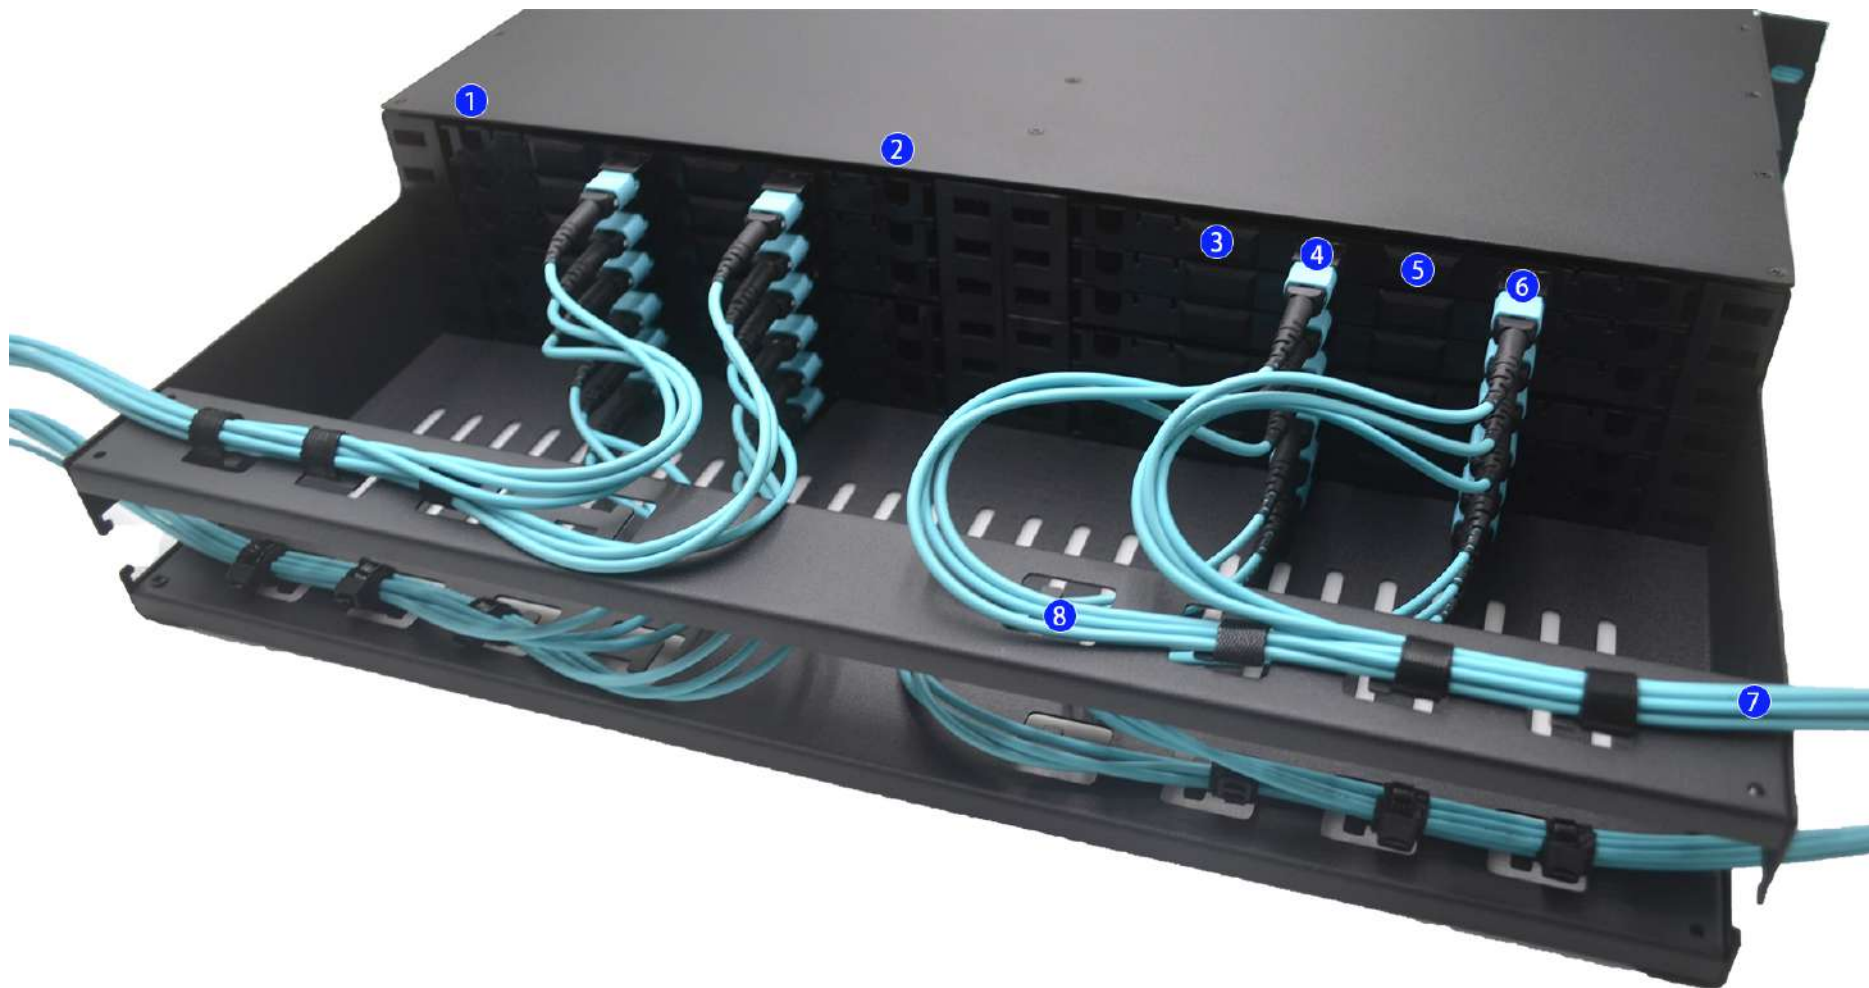

Cassette Module

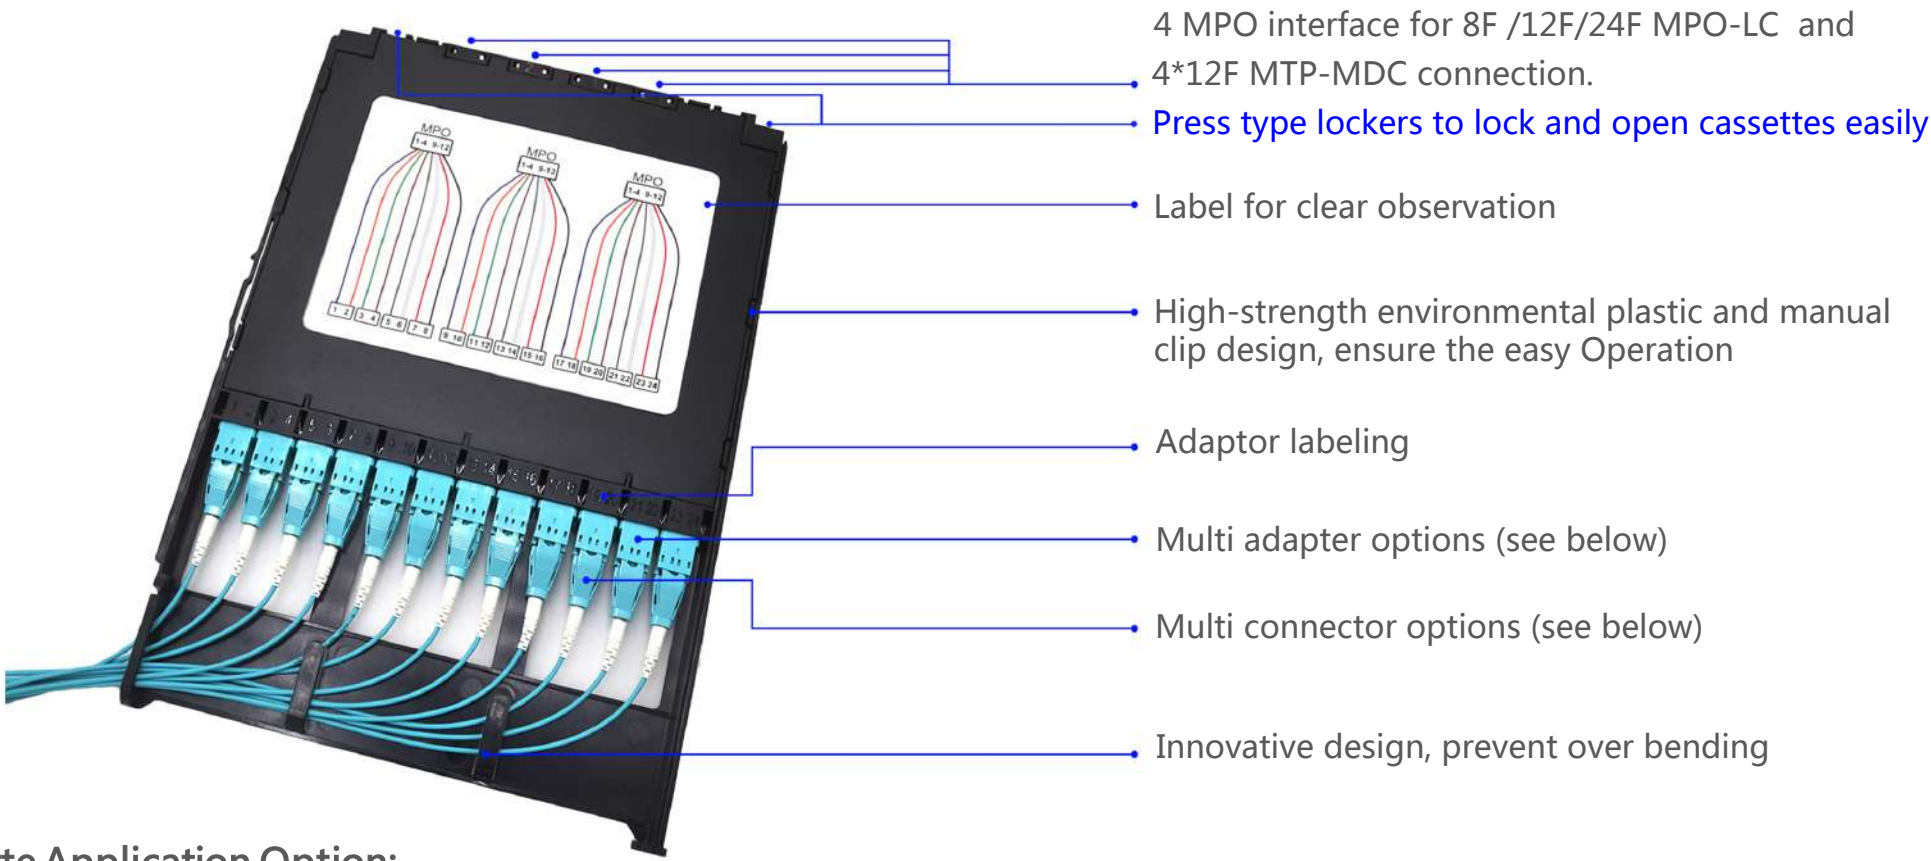

Cassette Application Option:

TYPE		CONNECTOR				FRONT ADAPTOR			
PICTURE									
NAME	LC Uniboot	Push-Pull Uniboot	Duplex LC	Simplex SC	MDC 2 ports adapter	MDC 3 ports adapter	LC inner shutter duplex adapter	MPO adapter	SC simplex adapter

Cassette Module



2-MPO-12LC Connection



3-MPO-8LC Connection



1-MPO-24LC Connection

Cassette Module



3*1X8 PLC Connection



24 Splice connection